

Section B28 Tracks


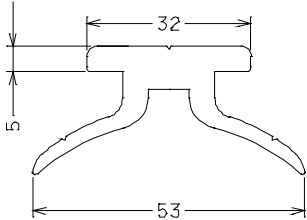
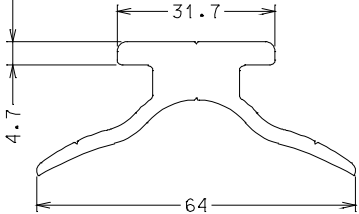

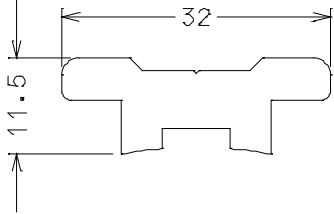
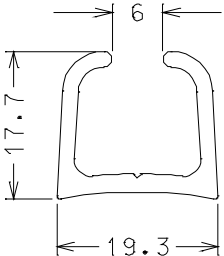
B28.1 Tracks

Allyacht Spars Australia produces the tracks below principally for fitting to masts to suit mainsail luff systems, spinnaker pole systems and trisails. All tracks are fully anodised and ready for fitting. Some tracks are supplied undrilled so that the exact hole pattern can be determined on site, some are supplied predrilled to the standard hole pattern, and for some, there is an option of either undrilled or predrilled.

The table summarises specifications of each track, and further details are provided after the table. For further information on the Ronstan batten car systems, go to www.ronstan.com

| DESCRIPTION | UNDRILLED PART NO. | PREDRILLED PART NO. | SIZE mm x mm | AREA mm ² | MASS kg/m |
|--------------------------------------|--------------------|---------------------|-----------------|-------------------------|--------------|
| RCB track suit RF7000 | IMRCB.A | NA | 24.9 x 22.7 | 333 | 0.904 |
| RCB track suit Ronstan Series 22 | AYS-22R.A | NA | 22 x 22.9 | 292 | 0.788 |
| RCB track suit Ronstan Series 26 | AYS-26R.A | NA | 26.5 x 24.9 | 386 | 1.042 |
| RCB track suit Ronstan Series 30 | AYS-30R.A | NA | 30 x 27.1 | 472 | 1.274 |
| Spinnaker track 32mm suit small mast | IMFT32-A | IMFT32-AD | 53 x 25.1 | 371 | 1.056 |
| Spinnaker track 32mm suit large mast | IMFT32/2.A | IMFT32/2.AD | 64 x 27 | 436 | 1.181 |
| Trisail track 7/8" | IMST-T.A | IMST-T.AD | 32 x 11.5 | 178 | 0.483 |
| T-track 32mm | NA | IMT32.AD | 21 x 11.5 | 225 | 0.608 |
| Bolt rope track heavy | AYS062.A | NA | 19.3 x 17.7 | 111 | 0.302 |

| | | |
|---|--|--|
| <p>Part No. IMRCB.A</p> <p>Description RCB track suit RF7000</p> | <p>This track accommodates the Ronstan RF7000 batten car system.</p> <p>It is a 'push-up track', made to slide up into the aft face of most Allyacht Spars mast sections in the range from IM12L to IM22W. Fitting must be before the mast is stepped in the boat.</p> | |
| <p>Part No. AYS-22R.A</p> <p>Description RCB track suit Ronstan Series 22</p> | <p>This track accommodates the Ronstan Series 22 batten car system.</p> <p>It is a 'push-up track', made to slide up into the aft face of Allyacht Spars mast sections from AYS235 to AYS340. Fitting must be before the mast is stepped in the boat.</p> | |
| <p>Part No. AYS-26R.A</p> <p>Description RCB track suit Ronstan Series 26</p> | <p>This track accommodates the Ronstan Series 26 batten car system.</p> <p>It is a 'push-up track', made to slide up into the aft face of Allyacht Spars mast sections from AYS235 to AYS340. Fitting must be before the mast is stepped in the boat.</p> | |

| | | |
|--|---|---|
| <p>Part No. AYS-30R.A</p> <p>Description RCB track suit Ronstan Series 30</p> | <p>This track accommodates the Ronstan Series 30 batten car system.</p> <p>It is a 'push-up track', made to slide up into the aft face of Allyacht Spars mast sections from AYS235 to AYS340. Fitting must be before the mast is stepped in the boat.</p> |  |
| <p>Part No. IMFT32.A</p> <p>Description Spinnaker track 32mm – suit small mast</p> | <p>This track accommodates a variety of spinnaker pole systems, and is suitable for Allyacht Spars masts from IM12L up to IM21R</p> <p>Variations It can be supplied either pre-drilled, or undrilled in case the holes need to match an existing pattern.</p> |  |
| <p>Part No. IMFT32/2.A</p> <p>Description Spinnaker track 32mm – suit large mast</p> | <p>This track accommodates a variety of spinnaker pole systems, and is suitable for Allyacht Spars masts from IM22 to AYS340.</p> <p>Variations It can be supplied either pre-drilled, or undrilled in case the holes need to match an existing pattern.</p> |  |
| <p>Part No. IMST-T.A</p> <p>Description Trisail track 7/8"</p> | <p>This track has a variety of applications apart from as a trisail track.</p> <p>Variations It can be supplied either pre-drilled, or undrilled in case the holes need to match an existing pattern.</p> |  |
| <p>Part No. IMT32.A</p> <p>Description T-track 32mm</p> | <p>This standard T-track has a variety of applications.</p> <p>Variations It can be supplied either pre-drilled or undrilled. Predrilled track is drilled for 1/4" countersunk fastenings at 100mm centres, and 8mm diameter stop holes at 50mm centres. Undrilled track is used in cases where the fastening holes need to match an existing pattern.</p> |  |
| <p>Part No. AYS-062.A</p> <p>Description Boltrope track heavy</p> | <p>The boltrope track accommodates standard boltropes or sail slides.</p> <p>Variations It can be supplied either pre-drilled, or undrilled in case the holes need to match an existing pattern.</p> |  |